

Domestic Units – FORREST - Wall Mounted Model / R32 Refrigerant / Standard Functions

Model	Cooling Capacity		Power Supply Voltage	Performance				Dimensions Indoor (cm)	Copper Size	Refrigerant	Copper Length	
	Kwh	Rated Btu/hr		SEER	Energy Class Cooling	SCOP	Energy Class Heating				Total (m)	Vertical (m)
MHL12-2202	3.6	12'000 btu (3800 ~ 14200)	1 Phase	6.1	A++	4.0	A+++	80.5 x 19.4 x 28.5	1/4 & 3/8	R32	20	12
MHL18-2202	5.2	18'000 btu (5157 ~ 19900)	1 Phase	6.4	A++	4.0	A+++	95.7 x 21.3 x 30.2	1/4 & 1/2	R32	25	15
MHL24-2202	7.0	24'000 btu (7100 ~ 27000)	1 Phase	7.4	A++	4.0	A+++	104.0 x 22.0 x 32.7	3/8 & 5/8	R32	25	15
WIFI Dongle												




WI-FI DONGLE OPTION WITH ALL UNITS



Domestic Multi- Split Units – FORREST - Wall Mounted Model / R32 Refrigerant / Standard Functions

Model	Cooling Capacity		Power Supply Voltage	Performance				Dimensions (cm)	Copper Size	Refrigerant	Copper Length	
	Kwh	Rated Btu/hr		SEER	Energy Class Cooling	SCOP	Energy Class Heating				Total (m)	Vertical (m)
MHL42-3202 Outdoor	12.3	42'000 btu (10300 ~ 42000)	1 Phase	6.1	A++	3.5	A++	94.6 x 41.0 x 81.0	5x6.35mm (5x1/4in) / 4x9.52mm + 1x12.7mm (4x3/8in+1x1/2in)	R32	35	18
MHL42/12-3202 Indoor	2.0	12'000 btu (3800 ~ 13000)	1 Phase	6.1	A++	5.0	A++	80.5 x 19.4 x 28.5	1/4 & 3/8	R32		
MHL42/24-3202 Indoor	6.2	24'000 btu (7100 ~ 25000)	1 Phase	6.9	A++	5.3	A++	104.0 x 22.0 x 32.7	3/8 & 5/8	R32		
WIFI Dongle												

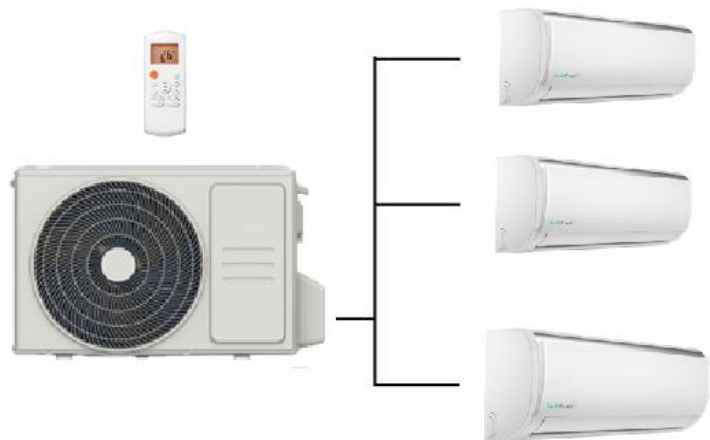

WI-FI DONGLE OPTION WITH ALL UNITS

